


# AC2030T

## TOP VENT GAS WALL HEATER

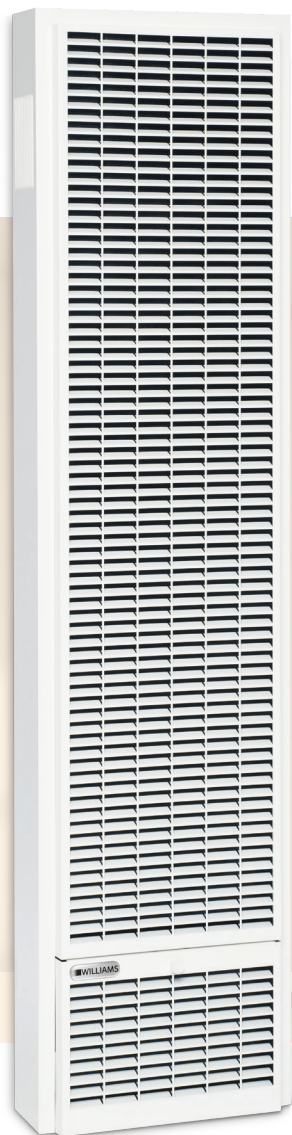


20,000 - 30,000 BTU/hr.  
(Heat rooms up to 1,000 sq. ft.)

The future is here. Introducing the Next Generation high performance, affordable, vented wall furnace heating solution. The AC2030T Top Vent Gas Wall Heater offers traditional home comfort with lower heating costs, convenience and high efficiency. Easily recessed or surface-mounted options are great in homes, schools, cabins, apartments, offices and shops.

Heating rooms individually allows comfort in areas being used while saving fuel costs in unused areas.

### FEATURES

- Superior comfort and efficiency 82% AFUE
- Ultra low NOx emissions
- Dynamic Response - for energy savings and a constant and comfortable temperature - just enough heat for your desired environment.
- No standing pilot - eliminates seasonal relighting, saves energy and eliminates methane emissions.
- Easy to install
- Quiet fans offer improved comfort and air circulation
- Reduced carbon footprint - fits into the same opening and uses the same venting as the traditional Monterey wall furnace.
- Optional external power supply kit available
- Programmable thermostat included for energy savings and comfort:
  - Easy to use
  - Dynamic response
  - Programmable heating schedule
  - Shows date and time
  - Manual and auto modes



# AC2030T TOP VENT GAS WALL HEATER

MODEL NUMBER	BTU/hr. INPUT	BTU/hr. OUTPUT	EFFICIENCY PERCENT	DIGITAL THERMOSTAT (INCLUDED)	POWER
			AFUE		
<b>SINGLE SIDED</b>					
AC2030TN	30,000	25,428	82%	PROGRAMMABLE	115V-60 HZ, 1 PHASE, LESS THAN 5.0 AMPS (dedicated circuit not necessary)
<b>MODEL DIMENSIONS</b>					
<b>SINGLE SIDED</b>		<b>WIDTH</b>	<b>DEPTH</b>	<b>HEIGHT</b>	<b>WEIGHT (LBS.)</b>
FURNACE DIMENSIONS (INCHES)		16	6	65 3/4	106
SHIPPING DIMENSIONS (INCHES)		17 1/2	11	71	120
<b>DOUBLE SIDED</b>					
FURNACE DIMENSIONS (INCHES)		16	6	65 3/4	145
SHIPPING DIMENSIONS (INCHES)		17 1/8	16 3/8	70 7/8	165

Conversion Kits Available. Settable elevation rating from sea level (0) to 4,500'

1/2" Gas Connection


## FEATURES

### CONTEMPORARY FINISH

Soft-white, powder-coat, heat-resistant finish to compliment any decor.

### INTERIOR FURNACE CLEARANCES

- 1" from an intersecting wall.
- 16" from the top of the appliance to the ceiling or other obstructions.
- 48" from the furnace front to draperies, furniture or other obstructions, or other combustibles.
- 2 1/2" from finished floor.

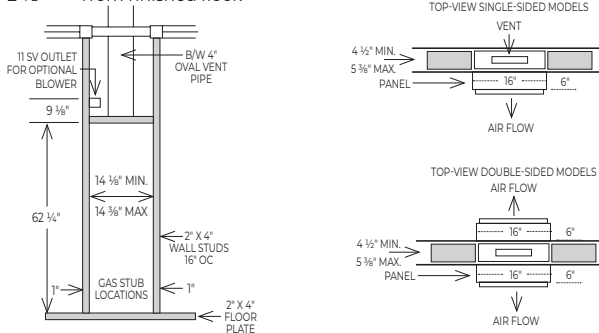

### IMPORTANT

**ANY WARRANTY CONSIDERATIONS ARE CONTINGENT ON INSTALLATION BY A QUALIFIED INSTALLER (CONTRACTOR). SELF-INSTALLATION IS PROHIBITED AND WILL INVALIDATE YOUR WARRANTY.**

- Read owner's manual before using/installing.
- Photographs are representative only.
- Check local codes and ordinances for permitted uses.
- Consult installation manual for clearances prior to installation.
- We reserve the right to amend product specifications without notice.
- Installation and servicing recommended by a qualified service person.
- Please read the warranty for any limitations of disclaimers. Combustion chamber carries a 10-year limited warranty. All other parts carry a one-year limited warranty.
- Venting must comply with the "Venting and Chimney Requirements" section of the instruction manual.



**WARNING:** This product can expose you to chemicals including epichlorohydrin which is known to the State of California to cause cancer and birth defects and/or other reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## ACCESSORIES

### REAR-OUTLET REGISTER

Register flush on rear wall, adjusts amount of heat delivered through rear register. Motorized rear outlet register for increased airflow also available.

**Model 6920** - Motorized model for surface mounted installation. Shipping weight 10 lbs.



### POWER SUPPLY KIT (OPTIONAL)

If power cord is not long enough to reach an outlet, this kit can be used to wire through the wall and into the home's power supply.

**M119015** - EXTERNAL POWER SUPPLY KIT Shipping weight .54 lbs.



### OVAL-VENT STARTER KIT

Contains hold down plate, oval-to-round adapter, spacer plates and two pieces of 2-foot lengths of oval pipe.

**Model 9929** - USA  
**Model 9930** - Canada  
Shipping weight 9 lbs.



### REPLACEMENT FACE PANEL

Soft white powder coat face panel  
**Model 4916** - shipping weight 30 lbs.

### FREE-STANDING KIT (AC2030T ONLY)

Allows single sided furnaces to be surface mounted instead of recessed. Ideal for remodeling in existing masonry construction or when studs are substandard. (furnace and face panel not included.)

**Model 4901** - Shipping weight 23 lbs.

